

TIME LED[®]

Prestige 7W LED CCT Fire Rated Downlight

Installation and Operating Instructions



DOWNLIGHT

7W
=56W

550-650
LUMENS

IP65

Read and follow instructions before operating your light.
Save this manual for future reference.

Package includes:

- 1 x Prestige 7W LED CCT Fire Rated Downlight
- 1 x Driver
- 1 x Manual

Bezel Attachment/Replacement:

- Bezels are available in a range of finishes.
- To install bezel, simply place on to downlight; magnets will hold the bezel in place.

The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire should be replaced.

Before installation or maintenance, ensure that the mains supply to the luminaire is switched off and the circuit supply fuses are removed or circuit breaker turned off.

A qualified electrician **MUST** be consulted or employed for the installation of this luminaire.

The luminaire must be installed according to the relevant building regulations.

Check that the total load on the circuit, including when this luminaire is fitted, does not exceed the rating of the circuit cable fuse of the circuit breaker.

INS-780855-V2

TIME LED is part of Pitacs Limited. For customer support contact:

Bradbourne Point, Bradbourne Drive, Tilbrook, Milton Keynes, Buckinghamshire MK7 8AT

T: +44 (0)1908 271155 F: +44 (0)1908 640017 E: info@timeled.co.uk W: www.timeled.co.uk







Product Code	780855
Size (mm)	88x83x83
Cut Out Size (mm)	Ø65-70
Watts	7W
Lumens	550-650lm
Lamp	SMD
IP Rating	IP65
Beam Angle	40

Material	Alu + PC
Dimmable	Yes + CCT Adjustable
Lifespan	37,500 hours
Voltage	200-260V
Input Frequency	50Hz
Current	0.03A
Colour Temp	3000K-4000K-6000K
Fire Rated	Yes

Instructions for new installations:

- 1) Ensure the units fit into the assigned area before installing.
- 2) Select a colour temperature using the slide switch on the front.
 WW = Warm White
 CW = Cool White
 DL = Daylight
- 3) Cut a suitable hole in the ceiling as per the cut-out details. Ensure that it does not damage electrical cables, water/gas pipes or ceiling joists.
- 4) Hold back the spring clip and push the lamp in. Make sure the downlight is fixed securely and flush against the ceiling.

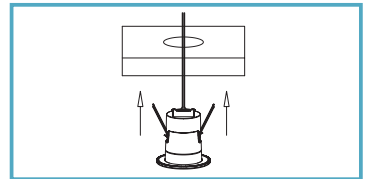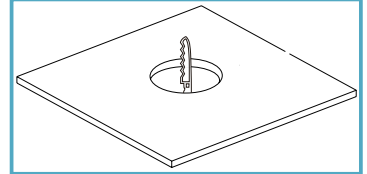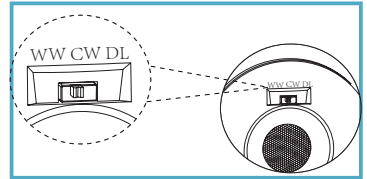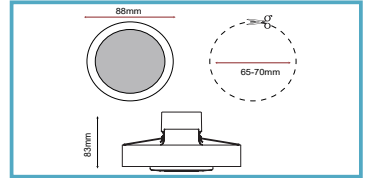

Cleaning:

- Do not use any chemical or abrasive cleaners.
- Clean product with only a soft dry cloth.

Warning:

- This product is not a toy and contains small parts.

Recycling Advice:

Waste Electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Luminaire is 30, 60 & 90 minute fire rated. Approved to: BS476 Part 21 Building Regulations Document B2 determines the ceiling type that is required depending on the type of building under construction. The ceiling types are designed to provide protection to the floor above in the case of fire for a duration as specified by the document.

Full Technical specification available upon request. Contact info@timeled.co.uk for PDF.