


TIME LED®

Secure Flood Light

Installation and Operating Instructions



Read and follow instructions before operating your light.
Save this manual for future reference.

Package includes:

- 1 x Secure Flood Light
- 1 x Manual

Safety:

- Installation of this luminaire should only be carried out by a qualified electrician or competent person the latest Building and current IEE Wiring Regulations (BS7671).
- Ensure to isolate mains prior to installation/maintenance.
- Check the total load on the circuit (including when this load is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Please note the IP (Ingress of Protection) rating of this product when deciding the location for installation.
- This product series is IP65 rated.
- Outdoor electrical installation should be protected by an earth leakage circuit breaker such as a residual current device (RCD). This will cut the power supply should it detect a leakage of current to earth which can be potentially dangerous.

INS-769119-769126-769133-769140-V2

TIME LED is part of Pitacs Limited. For customer support contact:

Bradbourne Point, Bradbourne Drive, Tilbrook, Milton Keynes, Buckinghamshire MK7 8AT

T: +44 (0)1908 271155 F: +44 (0)1908 640017 E: info@timeled.co.uk W: www.timeled.co.uk






Product Code	769119 769126 769133 769140
IP Rating	IP65
Beam Angle	120°
Lifespan	15,000 hours

Voltage	170-265V
Colour Temp	6000K-6500K Daylight
Energy Rating	A+
Warranty	2 Years

Instructions for new installations:

Ensure mains supply is switched off before installation.

- 1) Provide power to the required point of installation.
This product has an angled bracket for ease of installation and does not need to be removed.(Fig. 1)
- 2) Using the angled brackets as a template, mark the location of the fixing holes, and drill the holes ensuring not to infringe with any gas/water pipes or electrical cables.
- 3) Remove the four screws on the access plate at the rear of the fitting to expose the terminal block. (Fig.2)
- 4) Feed the cable through the copression gland on the rear of the access plate. Ensuring correct polarity is observed, carefully wire as shown in Fig.3.
- 5) Replace the access plate, gasket and screws then tighten the compression gland ensuring a tight seal to maintain the IP rating. Switch on power supply and check for correct operation.

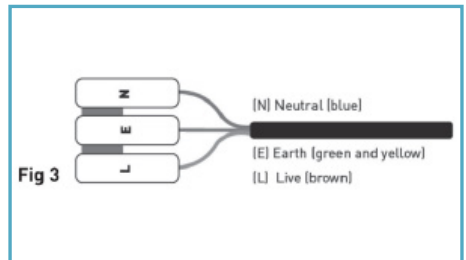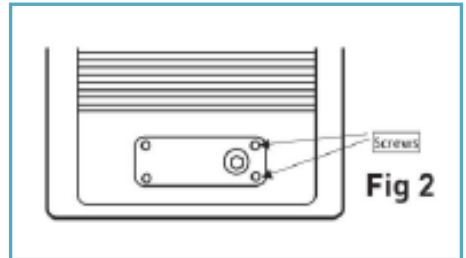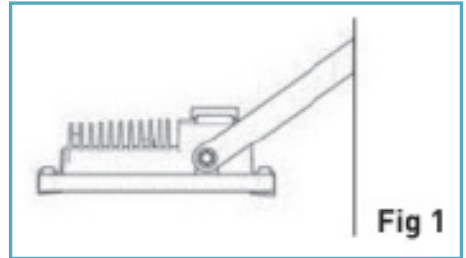

Cleaning:

- Do not use any chemical or abrasive cleaners.
- Clean product with only a soft dry cloth.

Warning:

- This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

Recycling Advice:

Waste Electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Full Technical specification available upon request. Contact info@timeled.co.uk for PDF.