

# Landscape Black IP65 GU10 Garden Spike Spotlight

Installation and Operating Instructions



Read and follow instructions before operating your light.

Save this manual for future reference.

#### Package includes:

1 x Landscape Black IP65 GU10 Garden Spike Spotlight

1 x Manual

# Safety:

- Before installation or maintenance, isolate the main electrical supply for the appropriate circuit at the fuse board.
- Check that the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Only fit the Spike Light in safe areas; for surfaces made of flammable materials (with an ignition temperature of at least 200°C and do not soften or become deformed at that temperature, such as wood or wood-derived materials 2mm or more) or non-flammable materials (which do not sustain a flame, such as metal, plaster, concrete (according to EN 60598-1).
- · Do not cover the casing.
- This product is IP65 rated and suitable for external applications.

INS-780886-V1

# TIME LED is part of Pitacs Limited. For customer support contact:

Bradbourne Point, Bradbourne Drive, Tilbrook, Milton Keynes, Buckinghamshire MK7 8AT T: +44 (0)1908 271155 F: +44 (0)1908 640017 E: info@timeled.co.uk W: www.timeled.co.uk
















Product Code	780886
Size (mm)	97x314
Lamp	GU10
Max Watts	50W
IP Rating	IP65
Lifespan (Hours)	7500 Hours

Voltage/Hertz	220-240V 50/60Hz
Cable Length	1 Metre
Material	Aluminium
Dimmable	No
Warranty	1 Year

# Instructions for new installations:

- 1) After deciding where to place the spotlight, ensure cables are long enough to connect from mains supply to spike light in the desired position, and are not a trip hazard. Screw the spike attachment into the spotlight unit.
- 2) Push spike into the ground, ensuring the lighting unit is facing in the desired direction.
- 3) Make adjustments to height of the light angle as required, by rotating lighting unit on holding bracket.
- 4) Connect the power supply conductors Brown phase conductor (L) and Blue neutral conductor (N) to the vacant terminals of the tread coupling. Make sure conductors have been correctly installed and are secure before restoring power.

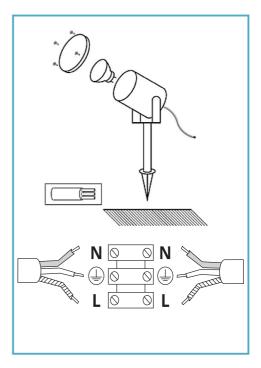

# Cleaning:

- · Do not use any chemical or abrasive cleaners.
- · Clean product with only a soft dry cloth.

### Warning:

• This product is not a toy and contains small parts.

## Warranty:

• This product is warranted to be free of defects in materials, design and workmanship for 1 year from the date of purchase (conditions apply, please see TIME LED website for further details). If a suspected fault should develop in this time, please contact us via the address on the front.

# Recycling Advice:

Waste Electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Full Technical specification available upon request. Contact info@timeled.co.uk for PDF.

