

TIME LED®

LANDSCAPE SENTRY GARDEN LAMP

Installation and Operating Instructions



Please read and follow the instructions before operating your light and save this manual for future reference.

Package includes:

- 1 x Landscape Sentry Lamp
- 1 x Manual
- *lamp not included

Tools that may be required:

- Drill
- Cross head screwdriver
- Small electrical slotted screwdriver
- Insulation tape

Features and benefits:

- Perfect for outdoor use
- Aluminium and glass material
- IP54 rated
- Easy & simple installation

Safety:

- Before installation or maintenance, isolate the main electrical supply for the appropriate circuit at the fuse board.
- Check that the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker.
- This product is IP54 rated and suitable for external applications.
- This product must be earthed

Cleaning:

- Do not use any chemical or abrasive cleaners.
- Only clean the product with a soft dry cloth.

Warning:

- This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.
- Do not wire this light into the lighting circuit - use a switched fuse spur.
- Before installation and servicing, disconnect the electricity supply at the mains. Carefully observe all instructions or warning that are labelled in, or supplied with, your product.
- Allow 10 minutes to cool before replacing, adjusting or cleaning.

Recycling Advice:

- Electrical products should not be disposed of with household waste. Please check with your local authority or retailer for responsible recycling advice.

Warranty:

- This product is guaranteed against faulty workmanship and material for a period of 12 month from the date of installation. TIMELED at its discretion will repair, replace or offer a refund for any defective product. Any alterations or modifications to this product without permission will void warranty. TIME LED will not be responsible for cost of removing, retrieving, reinstalling and installation of any replacements.

INS-SENTRY-V1

TIME LED is part of Pitacs Limited. For customer support contact:

Bradbourne Point, Bradbourne Drive, Tilbrook, Milton Keynes, Buckinghamshire MK7 8AT
T: +44 (0)1908 271155 F: +44 (0)1908 640017 E: info@TIMELED.co.uk W: www.TIMELED.co.uk



SPECIFICATION - SMALL

Product code	303272 / 303302
Fitting	ES Edison Screw (E27)
Wattage	60W MAX
Dimmable	No
CCT	No
Diameter	Ø176mm
Height	322mm
Warranty	1 Year
Input frequency	50/60Hz
Voltage	220-240V
Material	Aluminium + Glass
Packaging	Foam + Colour Box
IP Rating	IP54

Products: 303272 / 303302

SPECIFICATION - MEDIUM

Product code	303289 / 303319
Fitting	ES Edison Screw (E27)
Wattage	60W MAX
Dimmable	No
CCT	No
Diameter	Ø216mm
Height	374mm
Warranty	1 Year
Input frequency	50/60Hz
Voltage	220-240V
Material	Aluminium + Glass
Packaging	Foam + Colour Box
IP Rating	IP54

Products: 303289 / 303319






SPECIFICATION - LARGE

Product code	303296 / 303326
Fitting	ES Edison Screw (E27)
Wattage	60W MAX
Dimmable	No
CCT	No
Diameter	Ø274mm
Height	465mm
Warranty	1 Year
Input frequency	50/60Hz
Voltage	220-240V
Material	Aluminium + Glass
Packaging	Foam + Colour Box
IP Rating	IP54


Products: 303296 / 303326

Instructions for new installations:

- Ensure the electricity is turned off at the mains before installing or maintaining any electricity fitting.
- For a new installation, check for any electrical cables or pipe work (gas/water) in the vicinity of the intended mounting point for this product, before proceeding with the installation.
- Choose a fixing location. Although these fittings are rust proof and resistant to rain they must not be placed where they will be exposed to consistent running water.

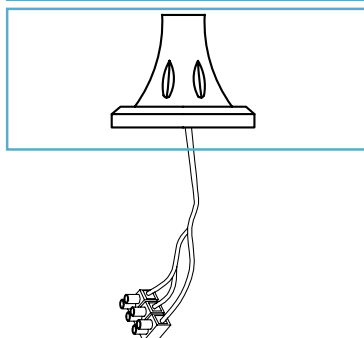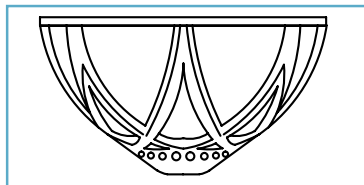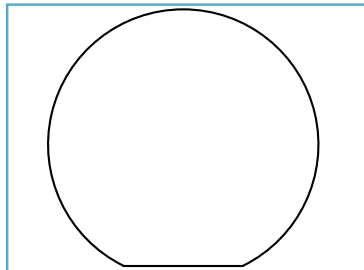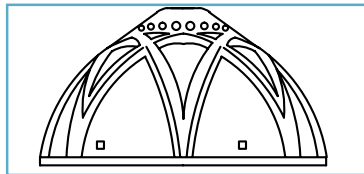

- 1) Remove the four screws from the splashproof connection box, and remove cover.
- 2) Correctly identify the wires and connect to the block as shown in diagram (1)
 - Green/Yellow - Earth
 - Blue - Neutral
 - Brown - Live
- 3) Ensure the connections are tight and no loose strands have been left out of the connection block.
- 4) Replace the four screws and affix the cover on the splashproof connection box.
- 5) Securely fix the product using the supplied fitting kit.

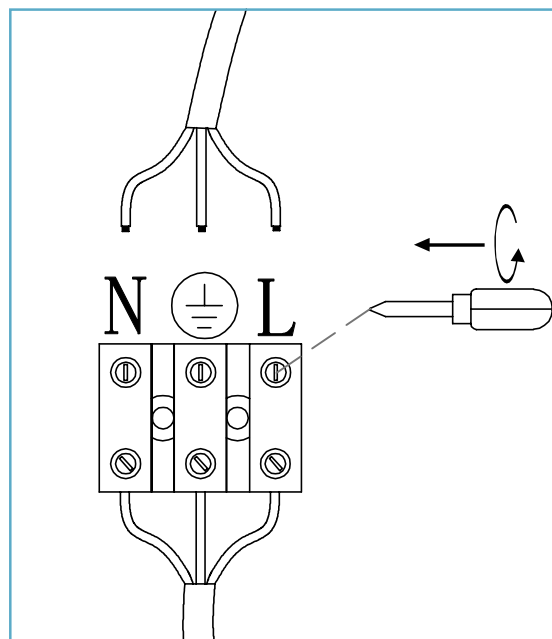

Full technical specification available upon request. Contact info@TIMELED.co.uk for PDF.