

Elements 200W UFO Highbay

Installation and Operating Instructions



Read and follow instructions before operating your light. Save this manual for future reference.

Package includes:

1x Black 200W UFO Highbay

1 x Mounting Hook

1 x Manual

Safety:

- This highbay must be earthed.
- · Before installation or maintenance, ensure that the mains supply to the highbay is switched off and the circuit supply fuses are removed or circuit breaker turned off.
- · Check that the total load on the circuit, including when this highbay is fitted, does not exceed the rating of the circuit cable fuse of the circuit breaker.

Cleaning:

- Do not use any chemical or abrasive cleaners.
- · Clean product with only a soft dry cloth.
- · Cleaning should be carried out at regular intervals so as not to impair performance or thermal safety of the luminaire.

Warning:

· This product is not a toy and contains small parts.

Warranty:

· This product is warranted to be free of defects in materials, design and workmanship for 5 years from the date of purchase (conditions apply, please see TIME LED website for further details). If a suspected fault should develop in this time, please contact us via the address below.

Recycling Advice:

Waste Electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Installation of this luminaire should only be carried out by a qualified electrician or competent person to the current Building and IEE Wiring Regulations (BS7671).

INS-790236-V3














Product Code	790236
Size (mm)	Ø365x123
Lamp	SMD 2835
Watts	200W
Equivalent Wattage	400W
Cable Length	2m


Lumens	30,000lm
IP Rating	IP65
Colour Temp	6000K Daylight
Beam Angle	110°
Material	Aluminium & Glass
Temperature	-20°C to 45°C

Dimmable	No
Voltage/Hertz	100-277V
Lifespan	50,000 hours
Warranty	5 Years
Energy Rating	A+

Instructions for new installations:

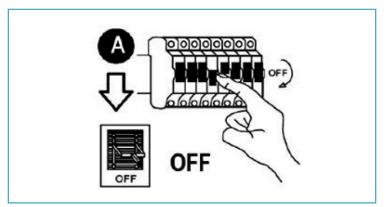


1) Ensure mains supply is switched off before installation.

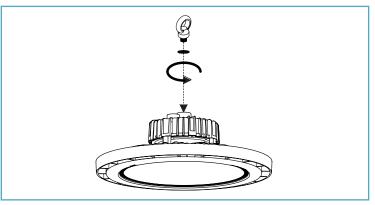


2) Attach enclosed mounting hook, ensuring you tighten to a torque setting of no less than 8.5 Nm.




3) Check that mounting method is of suitable weight rating to support the luminaire safely. Allow additional length within mounting if the designated location is affected by air movement, which could cause the luminaire to swing or rotate.



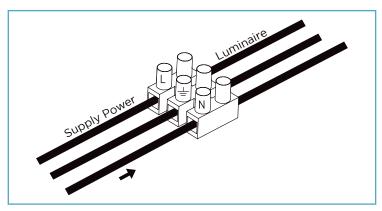

4) Connect mains power to the luminaire using a straight screwdriver to fix the wire into the right position. L to brown cable, N to blue cable, Green/Yellow as earth cable.

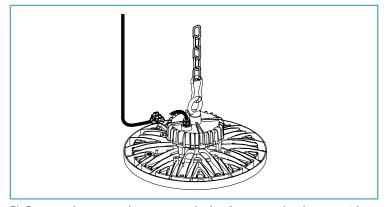

5) Once mains power is connected, check connection is correct by switching the power supply on.

Full Technical specification available upon request. Contact info@timeled.co.uk for PDF.