


### SPECIFICATION SHEET

PRODUCT CODE: 325052



Powerful, slimline, lightweight and ultra efficient, the Diamond Daylight LED Panel Light comes feature-packed for brighter, safer, healthier lighting in commercial, educational and institutional settings. With 3,640 lumens output in Daylight (6000K) and a PMMA diffuser, this panel is both bright and super-efficient at 140 lumens per watt. The flicker-free UGR19 rating means less glare, while a TP(a) rating gives added protection in case of fire. Add a Utility Universal Emergency Module (product codes 761441 / 761441-M) for extra peace of mind with backup power in a power outage.

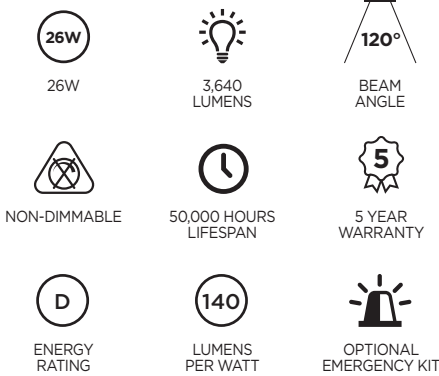

### SPECIFICATION

|                        |                |
|------------------------|----------------|
| Product Code           | 325052         |
| Wattage                | 26W            |
| Lumens per Watt        | 140 lm         |
| Lumens                 | 3,640 lm       |
| LED                    | SMD 5050       |
| Length                 | 595mm          |
| Height                 | 595mm          |
| Depth                  | 9mm            |
| Cable Length           | 15cm           |
| Cable Colour           | White          |
| Weight                 | 1.4 kg         |
| Lifespan               | 50,000 hours   |
| Beam Angle             | 120°           |
| Warm / Cool / Daylight | Daylight       |
| Colour Temp/Kelvin     | 6000K          |
| Dimmable               | No             |
| Warranty               | 5 years        |
| Energy Rating          | D              |
| IP Rating              | IP20           |
| Material               | Aluminium & PS |
| Packaging              | Brown Box      |
| Driver Included        | Yes            |

|                    |              |
|--------------------|--------------|
| Current (A)        | 0.125A       |
| Hertz (Hz)         | 50/60Hz      |
| Ra                 | >80          |
| Power              | 26W          |
| Voltage            | 220-260V     |
| UGR                | <19          |
| Energy Consumption | 26 kWh/1000h |
| Power Factor       | >0.9         |
| Input Frequency    | 50/60Hz      |
| Colour Tolerance   | 2.7          |
| PMMA               | Yes          |

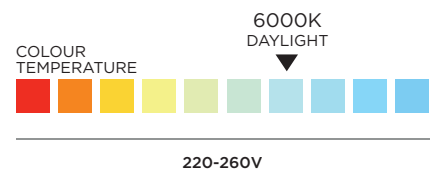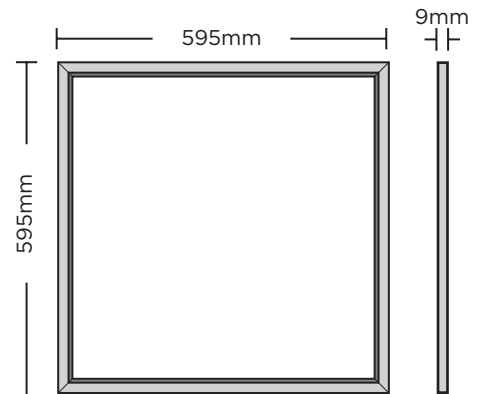

TIME LED is the Lighting Division of Pitacs Limited

Bradbourne Point, Bradbourne Drive, Tilbrook, Milton Keynes, Buckinghamshire MK7 8AT

T: +44 (0)1908 271155 F: +44 (0)1908 640017 E: info@TIMELED.co.uk W: www.TIMELED.co.uk



TIMELED-325052-SPEC-SHEET-JUL2024