

TIME LED®

Stellar 12W COB LED Downlight

Installation and Operating Instructions



Read and follow instructions before operating your LED Downlight.
Save this manual for future reference.

Package includes:

- 1 X Stellar 12W COB LED Downlight
- 1 x Manual

Safety:

- Installation of this luminaire should only be carried out by a qualified electrician or competent person to the current building and IEE Wiring Regulations (BS7671).
- Before installation/maintenance, ensure that all mains supply to the luminaire is switched off and the circuit fuses are removed or switched off.
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Please note the IP (Ingress of Protection) rating of this luminaire when deciding the location for installation.
- This product is IP20.
- DO NOT cover the luminaire with any insulation or flammable materials.

INS-769621-V2

TIME LED is part of Pitacs Limited. For customer support contact:

Bradbourne Point, Bradbourne Drive, Tilbrook, Milton Keynes, Buckinghamshire MK7 8AT


T: +44 (0)1908 271155 F: +44 (0)1908 640017 E: info@timeled.co.uk W: www.timeled.co.uk




| | |
|--------------|---------|
| Product Code | 769621 |
| Size (mm) | Ø96x145 |
| Watts | 12W |
| Lumens | 1000lm |
| Dimmable | No |
| Beam Angle | 38° |

| | |
|-------------|-----------------------|
| Lifespan | 50,000 Hours |
| Colour Temp | Cool White 4000-4500K |
| Material | Aluminium |
| IP Rating | IP20 |
| Voltage | 220-240V |
| Warranty | 5 Years |

Installation Instructions:

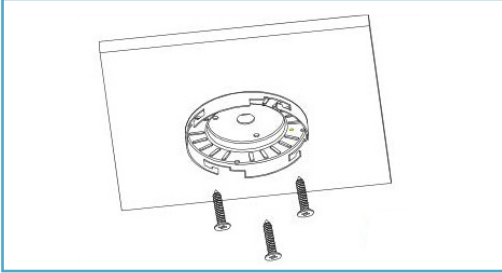


1) Thread cables through the top plate and fix the top plate to the ceiling with screws provided.

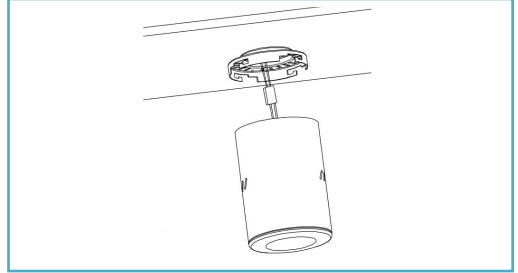


2) Connect the cables to the luminaire, ensuring all wires are in the right location.

DISCONNECT POWER BEFORE INSTALLATION

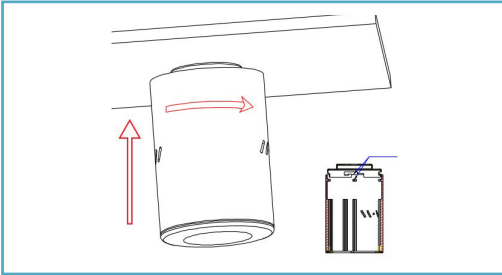

3) Align and push up the lamp body to top plate correctly, and then rotate it clockwise to lock it in place with the top plate.

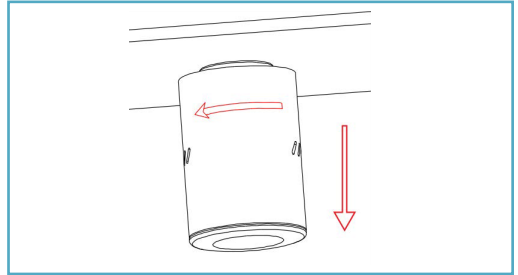

4) To test lamp is secure, pull down and rotate anticlockwise gently - the lamp should not turn. To remove, push lamp up and rotate anticlockwise, this will allow the lamp body to be taken down.

Cleaning:

- Do not use any chemical or abrasive cleaners.
- Clean product with a soft, dry cloth.

Warranty:

- This product is warranted to be free of defects in materials, design and workmanship for 5 years from the date of purchase (conditions apply, please see TIME LED website for further details). If a suspected fault should develop in this time, please contact us via the address on the front.

Recycling Advice:

Waste Electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Full Technical specification available upon request. Contact info@timeled.co.uk for PDF.