

SPECIFICATION SHEET

PRODUCT CODE: 777985

This 50W ECO LED Floodlight is ideal for domestic, commercial and security installations. The Floodlight boasts a 15,000-hour lifespan and has a wide 120° beam angle spreading the light out. Coupled with a 4000-lumen light output, the final product is a garden or drive full of bright light. This floodlight comes fully IP65 rated, meaning the durable glass front and aluminium casing are perfect for enduring any weather.



FLOOD LIGHT



400W
EQUIVALENT



4000
LUMENS



120°
BEAM
ANGLE



NON-DIMMABLE



15,000 HOURS
LIFESPAN



2 YEARS
WARRANTY






ENERGY
RATING

SPECIFICATION

Product code	777985
Fitting	Flood Light
Bulb shape	SMD
Wattage	50W
Equivalent wattage	400W
Lumens	4000lm
Ra	80
Dimmable	No
Beam Angle	120°
Width	210mm
Height	158mm
Depth	42mm
Lifespan	15,000 hours
Warranty	2 Years
Energy consumption	50kWh/1000h
Input frequency	50Hz
Voltage	220-240V
Energy rating	A+
Material	Alluminium Body + Glass Cover
Packaging	White Box + Colour Label
IP Rating	IP65

OPTICAL TEST PARAMETERS

Voltage	220-240V
Current	0.225A
Power	49.6W
CCT	No
Ra	80
Lumens	5354lm
Lumens per watt	85lm/W
Colour tolerance	<6
Power factor	0.9

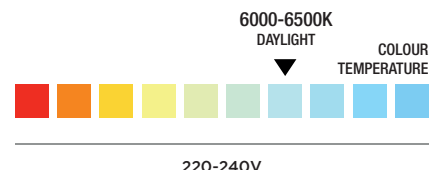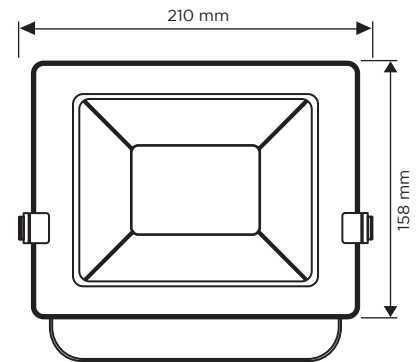

TIME LED is part of Pitacs Limited

Bradbourne Point, Bradbourne Drive, Tilbrook, Milton Keynes, Buckinghamshire MK7 8AT
T: +44 (0)1908 271155 F: +44 (0)1908 640017 E: info@timeled.co.uk W: www.timeled.co.uk



SPEC_777985_V1_JULY2020